

Magic or art?

Allow YouTube

You have to allow embedding YouTube videos to watch this video.

By allowing you agree to the [privacy policy](#). A corresponding cookie is set.



HiPIMS Technology from CemeCon

HiPIMS is conquering the markets as a coating technology. A few years ago, when this technology was first introduced, CemeCon in particular set industry standards as a technology leader and pioneer. In the meantime, other manufacturers also offer similar technologies, but 35 years of experience in sputtering and 15 years in the application of HiPIMS cannot be caught up so quickly.

The performance of a cutting tool is determined by the cutting edge. And this is where a coating has the hardest time! Whether it's a micro-milling cutter with the sharpest edges for titanium machining or the highest possible coating thickness on cutting inserts for heavy-duty machining: the fine-tuning of the coating residual stresses to the geometry of the cutting edge is the crucial point. This is exactly where HiPIMS comes in, transferring the precision of the tool manufacturer in designing the micro-geometry of the cutting edge to the coating world.

What makes HiPIMS so special?


HiPIMS combines properties that previously required different coating processes or even multiple lines. HiPIMS coatings are smooth and droplet-free, the morphology is exceptionally dense with best adhesion, hard and tough at the same time and the coatings are characterized by very low residual compressive stresses. HiPIMS can be used to coat a wide range of substrates, and virtually any element of the periodic table can be used. But is every HiPIMS system on the market a guarantee for the future?

HiPIMS is not just HiPIMS!

CemeCon relied on sputter technology from the very beginning. Here, very high voltages are used for ionization. HiPIMS takes this approach a step further. Extremely short pulses form a high-energy plasma that ionizes the coating materials to be deposited in an unprecedented way. Handling this energy in the pulse units is thus a critical success factor. CemeCon has had a lot of practice in this. 35 years, to be precise.

The CC800® HiPIMS was designed from the ground up consistently and without compromise for HiPIMS. The HiPIMS pulse units are located on the chamber doors in close proximity to the cathodes. This

eliminates the need for a cable between the two components. Cable paths not only present a resistance and thus energy loss but also change the pulse patterns due to their inductance and capacitance. These limitations do not exist in the CemeCon HiPIMS systems. The same applies to the positioning of the HiPIMS bias in the immediate vicinity of the substrate table. Due to this design, the necessary energy reaches where it is needed, directly to the cutting tool to be coated, without loss or delay. All components are built by CemeCon itself and are 100% adapted to this task.

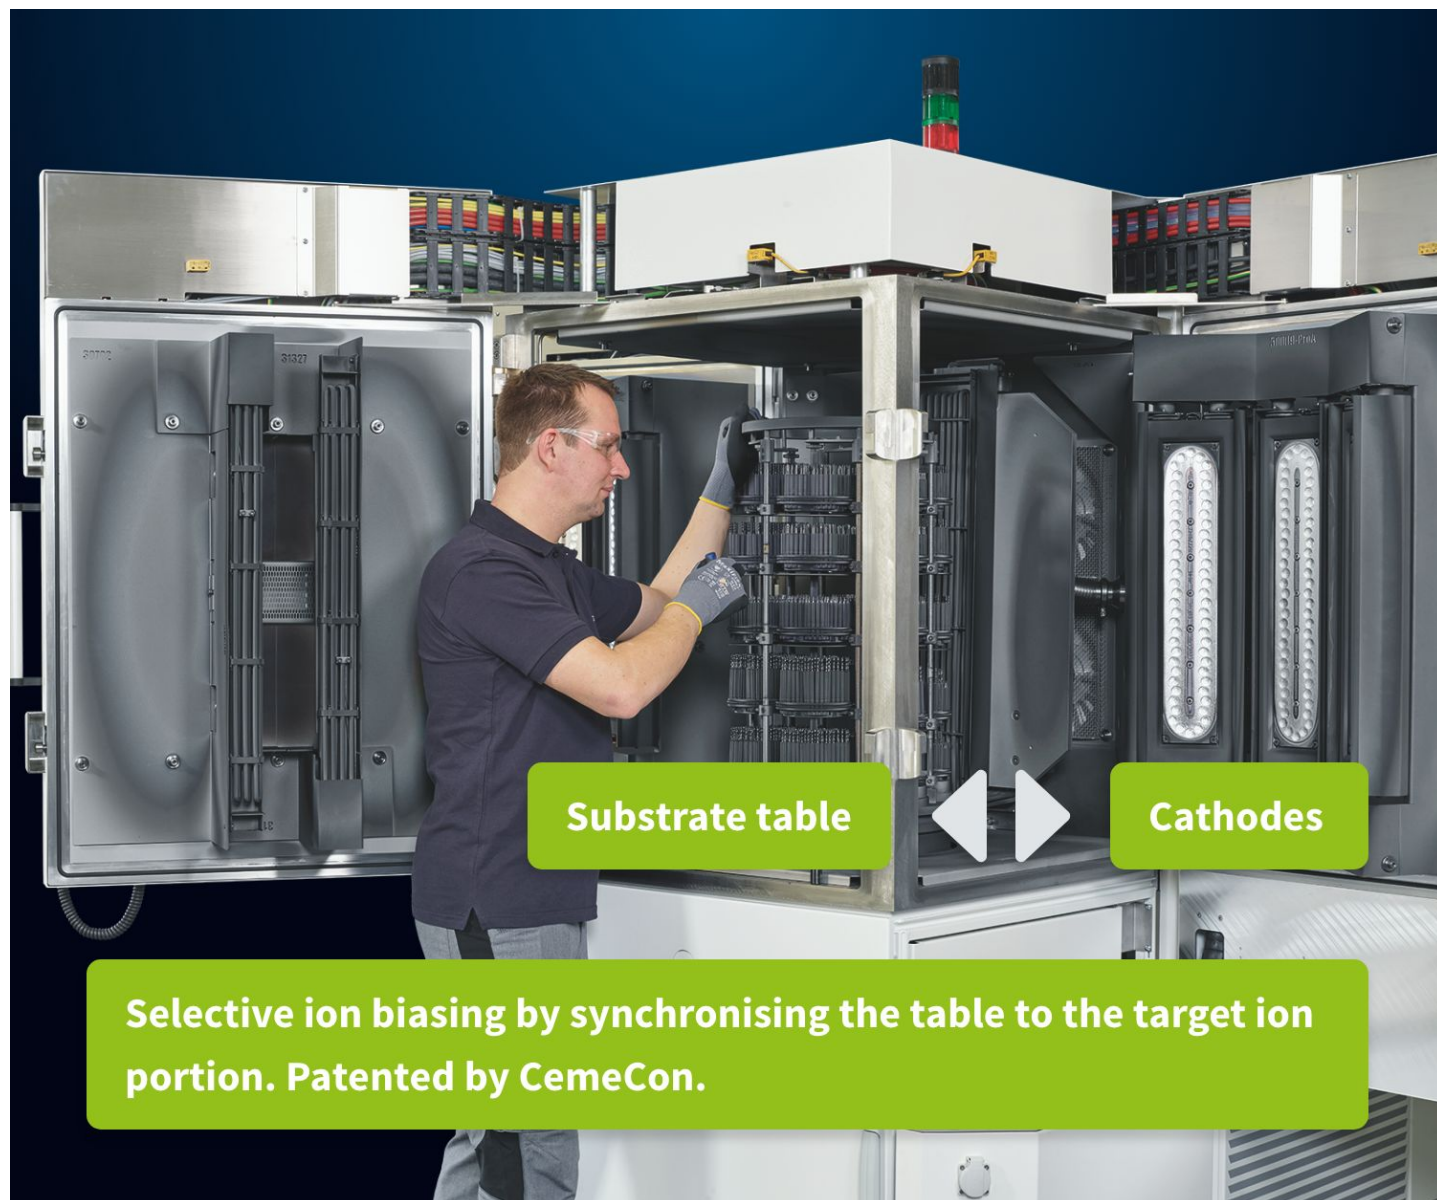

Synchronization of the HiPIMS pulses of the cathodes with the substrate table

How is it possible?

The synchronization between the cathodes and the substrate table makes the residual stress management of the coatings possible.

How it works: HiPIMS pulses are very short, but still consist of three phases. Energy is selectively applied to the substrate table only during the growth of the coating layer. This prevents working gas from entering the coating.

This technology package patented by CemeCon is the key to coatings with very low, adjustable residual

compressive stresses. The benefit for the tool manufacturer: the HiPIMS coating shows performance where it really matters: on the cutting edge of the cutting tool.



Full power into the plasma through lossless energy supply

New opportunities, new markets

Low residual stresses that can be specifically adjusted to the micro-geometry of the cutting edge are the key to completely new solutions for extremely sharp micro cutting tools for applications in medical technology with stainless steel, titanium and CrCo.

Milling applications dominate the manufacture of implants and hard milling market for the mold and die industry. The new SteelCon® coating material for hard machining benefits of the dense and thus tough layer, combined with low residual compressive stresses. This together provides the performance boost for the interrupted cut of a milling tool. This combination can only offer HiPIMS!

Crankshaft machining is the supreme discipline in the use of insert tools. In this high-performance milling application, in the heavy-duty machining of wind power components and in the milling of railroad rails, every μm more of the coating helps. The cutting performance of inserts with layer thicknesses of currently up to $12 \mu\text{m}$ with FerroCon® Quadro reaches an unprecedented level.

What sounds like magic is ultimately pure engineering!

SteelCon®

CC800® HiPIMS

PVD

Process reliability

Coating plant

Know-how transfer

HiPIMS

Residual stress management

Live-Batch

low residual compressive stress

Coating know-how